

# WSR-88D Tropical Cyclone Operations Plan

05/29/2009 Build 11 Systems

## NOTE

**For assistance with this Operations Plan at any time, call the WSR-88D Field Support Hotline (800-643-3363 or 405-573-8900).**

! This plan is designed to be used as an *operational reference*. Although the basic plan as presented here has been shown to be effective in many tropical cyclone events, local modifications to the plan can and should be made as required. Be sure to consult with your local Unit Radar Committee (URC) in advance concerning any changes which result in system wide modifications. Pre-hurricane URC agreements will allow changes to be made operationally as needs arise.

! Colors are used for specific purposes in this document. **Blue** is used to indicate a hyperlink or an alphanumeric value entered in an adaptation data menu. The hyperlinks can link to a different location in this document, to an e-mail address, or to an Internet address. **Red** is for a menu or menu selection.

There are two types of NOTES in this document. A **Green** font **NOTE** is an informational note. A box with a **Yellow** background is for a **very** special note, generally for operational guidance.

**Purple** or **brown** is occasionally used to make individual words stand out.

! New to Build 11 software is the ability to identify ground clutter dynamically (i.e., automatically with each volume scan) rather than relying on Clutter Suppression Regions or a static Bypass Map, which may often result in undersuppression or oversuppression. This is discussed in procedure 3.

! Some of the most important parts of this plan for both Class 1 (associated) users and Class 2 (non-associated) users (e.g., the National Hurricane Center, NHC) are the availability of the **256-data level Velocity** products at multiple elevation angles and availability of **Super Resolution** (SR) base products. SR reflectivity can be displayed to 460 km (248 nm), while SR velocity and spectrum width are displayed to 300 km (162 nm). There has been no change in the range of derived products. SR only applies to split cuts (i.e., elevation angles at and below 2.5° for VCP 31 and below 1.65 degrees in all other VCPs).

## NOTE

*While temporary additions of Generation List products and changes to adaptable parameters can be made on-site, each time the RPG is rebooted or the VCP/weather mode is changed, the edited Generation List and adaptable parameters will be replaced with the baseline versions. Therefore, it is suggested that you record these changes manually or backup your local "default" Generation List and adaptable parameters before implementing any changes and document all changes that are made. The **"Save Adaptation Data"** procedure is in EHB 6-520 Table 4-35.*

- Whenever there are major operational changes (resetting precipitation accumulations, changing algorithm adaptable parameters, such as Z/R relationship, changing the velocity measurement increment, etc.), **issue a Free Text Message (FTM)** to notify neighboring offices, national forecast centers, and River Forecast Centers of your changes.

## NOTE

*Execute procedures 1, 2, and 3 (below) before doing any other procedures. Nearly every procedure (or section) of this document assumes that the system is already in precipitation mode and will remain that way until the tropical cyclone event ends.*

- ! After the tropical cyclone threat has passed, return all parameters back to their proper or "default" values. The **"Restore Adaptation Data"** procedure is in EHB 6-520 Table 4-36. **Keep this information near the MSCF in case the data need to be restored.** If you are entering the data manually, refer to the current *"WSR-88D Guidance on Adaptable Parameters Handbook, Volume 1, RPG"* for system-wide defaults and your own notes for your site-specific ones. The Guidance on Adaptable Parameters can be accessed at <http://www.roc.noaa.gov/ssb/sysdoc/Operations.asp> (which requires a security log-in).
- ! All recommended adaptable parameter changes in this Plan are performed by the WFO using the URC level of change authority. If the URC-level password is required in any of the procedures, click on the padlock button in the upper right corner of the window; in the password pop-up window, select the **URC** radio button, type in the password, and then press the **<Enter>** key. There are no commands requiring Agency- or ROC-level passwords in this document.
- ! This Tropical Cyclone Operations Plan has been designed for sites that have at least Build **11** software. If there is a question about the RPG software build being

used, look at the top line (Main Panel) of the screen for the MSCF or for the RPG Control/Status Window (the main graphical user interface, also known as the RPG HCI). Select the “Update RPG Software” icon (  ) and then select “Build Number.” For example, the latest software build might be shown as “RPG Build: 11.0 Version: 1.12” (although the build number and version number may differ). To determine the build number of all radars using WSR-88D software, go to <https://www.roc.noaa.gov/ops/build.asp>. (Access to this site may be restricted.)

- ! For questions or comments that need an immediate response, contact the [WSR-88D Hotline](tel:800-643-3363) (800-643-3363) at the Radar Operations Center (ROC). Other questions about this document can be addressed to [Colin.J.McAdie@noaa.gov](mailto:Colin.J.McAdie@noaa.gov) (National Hurricane Center) or [Daniel.S.Berkowitz@noaa.gov](mailto:Daniel.S.Berkowitz@noaa.gov) (ROC).

Here is a brief summary of the recommended procedures in this document:

1. [Generator Fuel](#)
2. [Reinitializing Memory and Precipitation Accumulations](#)
3. [Clutter Suppression](#)
4. [Mode and VCP Selection](#)
  - a. [Mode Selection Function Settings](#)
  - b. [VCP Selection](#)
5. [Manual Mitigation of Range Folding](#)
6. [Velocity Increment for Extreme Wind Speeds](#)
7. [Algorithms](#)
  - a. [Mesocyclone Algorithm Optimization](#)
  - b. [Mesocyclone Detection Algorithm Optimization](#)
  - c. [Tornado Detection Algorithm Optimization](#)
  - d. [Velocity Azimuth Display \(VAD\) Algorithm](#)
  - e. [Precipitation Estimate Optimization](#)
    - i. [Z/R Relationship](#)
    - ii. [MXPRA](#)
    - iii. [Checking Precipitation Processing Adaptable Parameters](#)

8. [Selectable Product Parameters](#)
  - a. [Velocity Data Display Levels](#)
    - i. [16-Level Products](#)
    - ii. [256-Level Products](#)
  - b. [Super Resolution \(SR\) Products](#)
  - c. [Precipitation Product Display Levels](#)
9. [Archive Level II](#)
10. [AWIPS "Health" Check-up](#)
11. [AWIPS Data Archiving](#)
12. [AWIPS Data Requests from Adjacent Radars](#)
13. [Communications Backup](#)
14. [AWIPS Minimum RPS Lists](#)

The [Return to Contents ↑](#) hypertext link has been added for your convenience after each procedure to enable a quick return to this Table of Contents.

## A. At the WSR-88D RPG Human Computer Interface (HCI):

### NOTE

*All procedures for the RPG HCI in sections 1-9 (below) begin from the HCI Main Menu, the RPG Control/Status window, and may require the URC-level password.*

#### 1. [Generator Fuel](#)

At least two days prior to the onset of tropical cyclone rain bands, ensure that the RDA emergency power generator fuel level is maximized. It may be several days, or even weeks, before commercial power is restored in the aftermath of a significant tropical cyclone, and fuel delivery will likely be delayed. To check the fuel level:

**- On the right side of the HCI, in the Applications column, select **RDA Performance Data**, then select the **Tower/Utilities** tab.**

(Check % of **Generator Fuel Level** in the Power group and order fuel as deemed necessary.) If the generator is the current RDA site power source, the icon to the left of the RPG HCI's RDA icon will indicate "**Gen On**" or "**Util Avail**" and will include an illustration of a fuel tank; the fuel level is indicated within this fuel tank illustration.

[Return to Contents ↑](#)

## 2. Reinitializing Memory and Precipitation Accumulations

### NOTE

*You can select Hydromet along with Product Database in procedure 2a. to initialize both the product database and precipitation accumulations in one procedure.*

2a. A restart of the RPG should be done prior to onset of the tropical cyclone.

- At the HCI, click on **RPG Control** and a menu window will appear.
- In the RPG Control window, click **Shutdown**.
- Click **Yes** in the warning popup window to confirm your Shutdown command.
- Wait for the **State** (at the top of the RPG Control window) to show "**SHUTDOWN.**"
- Unlock the Initialization Control screen using the **URC** password.
- Select **Product Database** in the State Data group under Initialization Control.
- You can also select **Hydromet (excludes USP Database)**.
- Click on **Activate** and confirm this action in the warning popup window.
- Select **Startup** under Software near the top of the RPG Control window.
- Confirm the Startup command.

Alternatively, you can do a "clean" RPG startup, but read the following NOTE first.

### NOTE

*If changes are made to adaptation data without doing a Save Adaptation Data afterwards, performing a Clean Startup will erase the unsaved adaptation data from the system.*

- At the HCI, click on **RPG Control** and a menu window will appear.
- In the RPG Control window, click **Shutdown**.
- Click **Yes** in the warning popup window to confirm your Shutdown command.
- Wait for the **State** (at the top of the RPG Control window) to show "**SHUTDOWN.**"
- Unlock the Initialization Control screen using the **URC** password.
- Select **Clean Startup** under Software near the top of the RPG Control window.
- Confirm the Startup command.

2b. Reset the precipitation products to begin accumulating rainfall at the onset of the tropical event, preferably at 1200Z (although 1800Z, 0000Z, and 0600Z would be good alternate times). Coordinate this and any other changes affecting precipitation accumulations with your Service Hydrologist and River Forecast Center. To accomplish this, certain buffers used by precipitation processing need to be reinitialized.

## NOTE

*You can execute precipitation reinitialization without doing a Shutdown of RPG applications.*

To reset precipitation accumulations *only*:

- At the HCI, click on **RPG Control**, and a menu will appear.
- Ensure the RPG **State** is OPERATE, STANDBY, or SHUTDOWN.
- Unlock the Initialization Control screen using the **URC** password.
- Select **Hydromet (excludes USP Database)** in the Hydromet group under Initialization Control.
- Click on **Activate** and confirm this command in the warning popup window.
- **Close** the RPG Control window.

2c. Ensure the parameters for starting and ending accumulations have been set to reasonable numbers.

## NOTE

*The “Reflectivity (dBZ) Representing Significant Rain” (RAINZ) should be left at the default value of 20.0 dBZ, considered to be the lowest dBZ for liquid precipitable reflectivity. “Rain Area Threshold” (RAINA) should be the normal area of non-meteorological residual reflectivity of at least 20 dBZ (i.e., RAINZ) after proper clutter suppression has been done. An appropriate setting for RAINA should be determined locally during fair weather. Use the value for Significant Rain Area Detected in the Precipitation Status window as a guide. (This is the value being used by the Precipitation Processing Subsystem, as reflected in the AWIPS Supplementary Precipitation Data (SPD) alphanumeric product, WSRSPDxxx, where xxx is the three-letter radar identifier.)*

- Select the box to the right of **Precip Status:** (below the USERS icon).
- Read and record the value from the Precipitation Status window for **Significant Rain Area Detected**.
- Click on **Modify Parameters**.
- Unlock this screen using the URC password.
- Set **Reflectivity (dBZ) Representing Significant Rain [RAINZ]** to **20.0** dBZ.
- Set **Area with Reflectivity Exceeding Significant Rain Threshold [RAINA]** to a value (probably **greater than 80** km<sup>2</sup>) that is typical for the non-precipitation residual clutter area for your site (i.e., not eliminated from base reflectivity by clutter suppression in procedure 3 below).

- Click on **Save** and then **Yes** to confirm the Save command.
- **Close** the Algorithms (Adaptation Item: Hydromet Preprocessing) screen.
- **Close** the Precipitation Status window.

[{Return to Contents ↑}](#)

### 3. Clutter Suppression


Use “**CMD**” whenever possible. CMD stands for Clutter Mitigation Decision, software that identifies where there is ground clutter. This will improve rainfall estimates and overall algorithm performance. (Note that **Clutter Suppression Regions affect nearly all products.**)

#### NOTE

Refrain from using “All Bins” suppression everywhere, because it will often result in excessive suppression along the zero isodop. Never use “All Bins” at batch cut elevation angles (i.e., those above 1.65° in all VCPs but VCP 31) nor at any angle in the 200-series VCPs.

Enabling dynamic clutter identification (i.e., **CMD enabled**) is generally better than using either Clutter Suppression Regions or a static Bypass Map, because ground clutter locations change with beam propagation changes. If CMD is *not* enabled and the Bypass Map is selected, a static Bypass map will be used. The following steps describe how to enable CMD and to set up a Clutter Suppression Region with the Bypass Map in control:

At the lower right of the HCI (under the USERS icon) you will find the following:

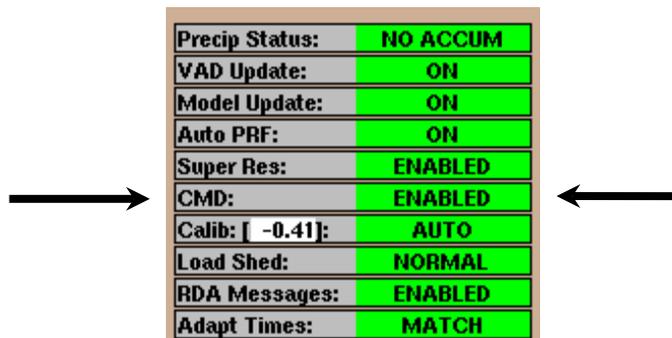


Precip Status:	NO ACCUM
VAD Update:	ON
Model Update:	ON
Auto PRF:	ON
Super Res:	ENABLED
CMD:	ENABLED
Calib: [ -0.41]:	AUTO
Load Shed:	NORMAL
RDA Messages:	ENABLED
Adapt Times:	MATCH

- Toggle the box to the right of **CMD**: to ensure the status is **ENABLED**.
- On the right side of the HCI (the Applications column), select **Clutter Regions**.

- Select **File**.
- Select **New**.
- Select the **Segment: 1 (Elevation Segment One)** button and edit the table to agree with the one shown below.
- Select each of the higher elevation segments as applicable for your site, and do the same editing.
- Select **Save As**, give this file a name (e.g., "**Minimum**"), and click **Accept** button.
- Select **Close** for the Clutter Region Files.
- Select **Download** in the main Clutter Regions window.
- Confirm changes and **Close**.

Example of Clutter Suppression Definition  
With Bypass Map in Control

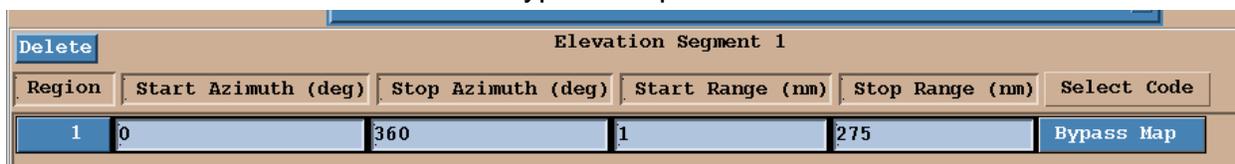

Region	Start Azimuth (deg)	Stop Azimuth (deg)	Start Range (nm)	Stop Range (nm)	Select Code
1	0	360	1	275	Bypass Map

**NOTE**

*Some locations may have residual clutter even after dynamic clutter identification has been invoked ("CMD enabled"), particularly in the lowest elevation segment. If so, define clutter suppression regions only for those locations in order to supplement the bypass map created by CMD.*

Refer to the EHB 6-521 (Operations Instructions, Radar Product Generation (RPG) Refresh (LINUX)) for Build 11 software, dated "15 May 2009," for more details on Clutter Regions and how to invoke or download them (Section 3.8).

[{Return to Contents ↑}](#)

#### 4. Mode and Volume Coverage Pattern (VCP) Selection

##### 4a. Mode Selection Function

The Mode Selection Function (MSF) uses computed reflectivity area above a specified threshold to determine when a system can automatically switch to/from Precipitation Mode and to/from Clear Air Mode. In order to ensure that automatic MSF selections don't override the VCP you have selected, put the Precipitation Switching and Clear Air Switching selections in ***Manual***.

- Select **Control** in the RDA icon on the HCI.
- Select **VCP and Mode Control** in the RDA Control/Status window.
- Select the **Manual** buttons under both Clear Air Switching and Precipitation Switching.
- Select the **View/Edit** button under Mode Automation Status.
- Select the **Modify Parameters** button.
- Unlock the padlock with the URC radio button and password.
- Select **Yes** in the “Ignore Mode Conflict Duration?” line.
- Select **Save**.
- Confirm this selection and **Close** this window.
- **Close** the Mode Automation Status window.
- **Close** the VCP and Mode Control window.
- **Close** the RDA Control/Status window.

#### 4b. VCP Selection

The two main considerations in VCP selection are (1.) the **range** from the radar to the center of the tropical cyclone and (2.) the location (with respect to the radar) of **structural regions** of the tropical cyclone.

Three new VCPs (211, 212, and 221) using the SZ-2 range unfolding technique were introduced in 2007. An existing VCP (121) has also been modified to use this technique in addition to using multiple PRF dealiasing (MPDA). These VCPs are designed to reduce range-folded Doppler data (or “purple haze”), which is often a major problem in tropical cyclones. A reduction in range-folding results in more velocity coverage, which allows better visual pattern recognition and better performance of algorithms based on velocity (such as clutter likelihood, which is used in precipitation processing, mesocyclone detection, and tornadic vortex detection).

Structural regions include the fair weather **eye** region, the convective **eyewall**, the convective **spiral bands**, the rather stratiform rainfall outside the eyewall and between spiral bands (sometimes called a “**moat**”), pre-hurricane **squall lines**, and the cirrus **outflow**. The spiral rain bands are particularly important, because they may include smaller circulations that could produce tornadoes or other damaging winds.

Velocity dealiasing can be a serious problem where there are large gaps between rain bands, and they may obscure detection of maximum winds in or near the eyewall. To mitigate velocity dealiasing failures (e.g. apparent inbound velocities where outbound should be and vice-versa), try VCPs 121, 211, 212, and 221 in that order.

The following table summarizes the recommended VCPs with their limitations and optimal usage in tropical cyclone events:

Tilts	VCP	Time*	Usage	Limitations
9	121	6 min.	Compared to other VCPs, this one significantly reduces range-obscured V/SW data within 230 km and is also useful when a tropical cyclone has a distant center or eye with no echoes near the radar. This should be the first choice for mitigating velocity dealiasing problems.	There are gaps in coverage above 5°. All Bins clutter suppression is NOT recommended. PRFs are not editable for any tilt.
9	221	6 min.	This reduces range-obscured V/SW data out to 300 km when compared to other VCPs. It is useful when a tropical cyclone has a distant center or eye. This should be the fourth choice for mitigating velocity dealiasing problems.	There are gaps in coverage above 5°. All Bins clutter suppression is NOT recommended. PRFs are not editable for SZ-2 (Split Cut) tilts, at 0.5° and 1.5°.
14	211	5 min.	This is useful when a tropical cyclone has a center or eye relatively close to the radar. It significantly reduces range-obscured V/SW data when compared to VCP 11. This should be the second choice for mitigating velocity dealiasing problems.	All Bins clutter suppression is NOT recommended. PRFs are not editable for SZ-2 (Split Cut) tilts, at 0.5° and 1.5°.
14	212	4½ min.	This has increased low-level vertical resolution compared to VCP 211. Significantly reduces range-obscured V/SW data when compared to VCP 12. This should be the third choice for mitigating velocity dealiasing problems.	All Bins clutter suppression is NOT recommended. PRFs are not editable for SZ-2 (Split Cut) tilts, at 0.5°, 0.9°, and 1.3°.
14	12	4½ min.	This is good, particularly for tropical cyclones over land, for detecting a severe convective event, such as a TVS. Extra low elevation angles increase low-level vertical resolution when compared to VCP 11. It has the fastest update rate.	Range folding needs to be monitored, ensuring that velocities around the center or eye can be clearly determined. PRFs may need to be manually changed frequently.

\* VCP update times are approximate.

For a more comprehensive overview of *all* VCPs, see Figure 3-12, the “Quick Reference VCP Comparison Table for RPG Operators” in EHB 6-521.

- Select **Control** in the RDA icon on the HCI.
- Select **VCP and Mode Control** in the RDA Control/Status window.
- Unlock the padlock with the URC radio button and password.
- Select “Download VCP from RPG”: **221** (or **211** or **212** or **121**) (“remote” VCPs)
- Confirm and **Close** this window.

All VCPs have a default 0.97 kt velocity increment (or velocity resolution), which limits velocity measurements to +/- approximately 122 kt and (except for VCP 121) a #5 PRF selection, which restricts the unambiguous range to 79 nm. To change the VELOCITY INCREMENT to display winds in excess of +/-122 kt, refer to procedure [6](#). (Procedure [8a](#) describes how to change the velocity scales.) To increase the unambiguous range to 94 nm in a VCP other than 121, 221, 211, or 212, refer to procedure [5](#).

As a diagnostic (if you are not sure if this change has been made), note that the AWIPS D2D cursor readout will indicate speeds in tenths of a knot for the .97 increment and whole knots for the 1.94 increment.

## NOTE

*If you see “Pedestal Dynamic Fault” messages, contact your electronics maintenance technician.*

[{Return to Contents ↑}](#)

### 5. Manual Mitigation of Range Folding

RPG HCI operators have the ability to move the maximum unambiguous range ( $R_{max}$ ) out to a maximum distance of **94 nm** or in to a minimum distance of **63 nm** by adjusting the PRF when allowed by the VCPs described above. This *may* become necessary to improve velocity products (particularly near the center of the storm) as the tropical cyclone approaches. The "Download" command invokes a "Remote" VCP (i.e., ones stored in the RPG). Remote VCPs (such as VCP 12) are defined with a PRF of 4 ( $R_{max} = 94$  nm) by default. When Auto PRF is Off, the default unambiguous range will remain at 94 nm for remote VCPs. The range/PRF can then be altered in order to see velocities around the center or eye of the storm. **Local** VCPs 11 and 21 (i.e., ones stored at the RDA) are defined with  $R_{max} = 79$  nm.

## NOTE

*The NHC prefers the  $R_{max}$  with sufficient range to provide velocity data near the eye or center of a tropical depression, tropical storm, or hurricane. However, local needs may dictate otherwise, and will take precedence. Therefore, a VCP with an operator-specified PRF (e.g., VCP 12) may need to be selected to mitigate range folding in a WFO's region of concern. VCP 121 does not use Auto PRF. VCPs 211, 212, and 221 only use Auto PRF in Batch Cut tilts (i.e., above the 1.65° elevation angle).*

- Select **Control** in the HCI's RDA icon.
- Select **VCP and Mode Control** in the RDA Control/Status window.
- Toggle Auto PRF **Off** and confirm this action in the popup window.
- Under Download VCP from RPG, select **121** (or **211**, **212**, **221**, or **12**).
- Confirm this selection and **Close** this window.

[{Return to Contents ↑}](#)

## 6. Velocity Increment for Extreme Wind Speeds

If velocities are expected to exceed **122 kt**, (Category 4 and 5 hurricanes) increase the velocity increment from 0.97 kt to 1.94 kt. The velocity color scale displayed with all 8-bit (256-data level) Velocity products on AWIPS is the same and *may be the same for both velocity increments*, making it hard to tell which velocity increment is being used. AWIPS D2D cursor sampling of velocity products will indicate speeds in tenths of a knot for velocity increments of 0.97 kt and ***in whole knots for velocity increments of 1.94 kt.***

### NOTE

***Ensure the velocity increment is the last change you make when modifying a VCP (i.e., in “Modify RPG VCP”).*** Otherwise, changes will be lost when a VCP change is made or the system is rebooted.

- Ensure **Auto PRF** is **Off** (as displayed in the information lines below the Users icon).
- Select **Control** in the HCI's RDA icon.
- Select **VCP and Mode Control** in the RDA Control/Status window.
- Unlock the padlock with the URC radio button and password.
- Select **221** (**211**, **212**, **121**, or other desired VCP number) on the “Precipitation:” line under “Download VCP from RPG.”
- Confirm that you want to download this VCP.
- Click on the **Modify RPG VCP** button.
- Toggle Velocity Increment (top right) to **1.94 kts**.
- **Save** this setting, **Download** it, confirm changes, and **Close** the RDA Control/Status window.

[{Return to Contents ↑}](#)

## 7. Algorithm Adaptable Parameter Changes

### NOTE

***Procedures 7a through 7c will independently increase the radar's detection efficiency for small, shallow circulations typically found in tropical cyclones. Precipitation algorithm changes (procedures 7di and 7dii) will result in more realistic rainfall estimates during tropical weather situations.***

### 7a. Mesocyclone Algorithm Optimization

The Threshold Pattern Vector (TPV) within the Mesocyclone algorithm may be reduced to **6** to improve detection of small diameter features; however, a greater number of false alarms may also be generated.

- Select **Products** in the HCI's RPG icon.
- From the RPG Products menu, choose **Algorithms**, then select Adaptation Item: **Mesocyclone** from the drop-down menu.
- Unlock the padlock with the URC radio button and password.
- Change **Min # Pattern Vectors [TPV]** value from **10** to **6**.
- **Save**, confirm changes, and **Close** this menu.

### 7b. Mesocyclone Detection Algorithm Optimization

The Mesocyclone Detection Algorithm (MDA) produces a Meso Detection (MD, #141) product and a Meso Detection Data Array (DMD, #149) product. The strength rank of the mesocyclone circulation should be lowered to enable detection of weaker circulations within the tropical cyclone. Be aware that a greater number of false alarms may be generated.

- From the RPG Products menu, choose **Algorithms**, then select Adaptation Item: **MDA** from the drop-down menu.
- Unlock the padlock with the URC radio button and password.
- Change **Minimum Display Filter Rank** value from **5** to **4** (or, possibly, **3**).
- **Save**, confirm changes, and **Close** this menu.

### 7c. Tornado Detection Algorithm Optimization

Parameters within the Tornado Detection Algorithm (TDA) should be changed to increase the probability of detecting weak or distant tornadoes; however, a greater number of false alarms will also be generated. For more information see "*Spratt, S. M., D. W. Sharp, P. Welsh, A. Sandrik, F. Alsheimer, and C. Paxton, 1997: A WSR-88D assessment of tropical cyclone outer rainband tornadoes. Wea. Forecasting, 12, 479-501. Copyright 1997 by AMS.*"

- From the RPG Products menu, choose **Algorithms**, then select Adaptation Item: **Tornado Detection** from the drop-down menu.
- Unlock the padlock with the URC radio button and password.
- Change **Min 3D Feature Depth** from **1.5** to **2.0**.
- Change **Min 3D Feat Low-Lvl Delta Vel** from **25** to **14**.
- Change **Min TVS Delta Velocity** from **36** to **44**.
- **Save**, confirm changes, and **Close** this menu.

#### 7d. Velocity Azimuth Display (VAD) Algorithm

If the center of the tropical cyclone is very close to the radar, it is possible that the wind barbs in the VAD Wind Profile (VWP) may become sparsely populated due to the inability of the VAD algorithm to fit the detected winds into a uniform pattern of incoming and outgoing wind. This can be mitigated by reducing the “VAD optimum slant range” (as long as the center is not within a few kilometers of the radar site).

- From the RPG Products menu, choose **Algorithms**, then select Adaptation Item: **VAD** from the drop-down menu.
- Unlock the padlock with the URC radio button and password.
- Change **VAD Analysis Slant Range** from the default of **30.0** to **15.0** km or another value closer to the radar than the cyclone center.
- **Save**, confirm changes, and **Close** this menu.

#### 7e. Precipitation Estimate Optimization

##### i. Z/R Relationship

Change the default (convective) Z/R relationship ( $300R^{1.4}$ ) to the tropical Z/R relationship ( $250R^{1.2}$ ) to provide better precipitation estimates. *This change should be coordinated with the River Forecast Centers (RFCs) that use data from your radar.* Switching to the tropical Z/R will increase the estimated precipitation accumulations, especially for higher reflectivities.

#### NOTE

*Closely monitor rainfall accumulations relative to ground truth observations. If the Z/R relationship is changed too far in advance of the tropical cyclone rainbands, the radar will overestimate totals associated with pre-landfall convection. Refer to the AWIPS text product, WSRSPDxxx (where xxx is the radar 3-letter identifier), to examine the bias table; pay particular attention to radar-gauge comparisons for periods up to 168 hours. Contact your River Forecast Center(s) for guidance.*

- From the RPG Products menu, choose **Algorithms**, then select Adaptation Item: **Hydromet Rate** from the drop-down menu.
- Unlock the padlock with the URC radio button and password.
- Set **Z-R Multiplier Coef. [CZM]** to **250**.
- Set **Z-R Exponent Coef. [CZP]** to **1.2**.
- Continue to the next step.

## ii. MXPRA (Maximum Precipitation Rate Threshold)

MXPRA should be increased to allow for greater rain rates. A MXPRA of **150** mm/hr (**5.9** in/hr) should be sufficient during most tropical cyclone situations. [The ROC recommends that the MXPRA *never* be set higher than 200 mm/hr (7.9 in/hr).] If the MXPRA is not adjusted, the default value will only allow for a maximum rate of **103.8** mm/hr (**4.1** in/hr). See the current Guidance on Adaptable Parameters (WSR-88D Handbook, Volume 1, RPG), section 7.7.1, for more information.

- From the RPG Products menu, choose **Algorithms**, then select Adaptation Item: **Hydromet Rate** from the drop-down menu.
- Unlock the padlock with the URC radio button and password.
- Set **Max Precipitation Rate [MXPRA]** to a value between **150** mm/hr (**5.9** in/hr) and **200** mm/hr (**7.9** in/hr).
- **Save**, confirm changes, and **Close** this menu and the RPG Products menu.

## iii. Checking Precipitation Processing Adaptable Parameters

In order to confirm which Z/R relationship is being used, read the REFLECT-TO-PRECIP RATE CONVERSION MULTIPLICATIVE COEFFICIENT and REFLECT-TO-PRECIP RATE CONVERSION POWER COEFFICIENT in paired alphanumeric data with the One-Hour Precipitation (WSROHPxxx in an AWIPS text window, where xxx is the three-letter radar identifier). MAX PRECIPITATION RATE can be found near the bottom of the same list of parameters.

[{Return to Contents ↑}](#)

## 8. Selectable Product Parameters

### 8a. Velocity Data Display Levels

Display of 16- and 256-data level Velocity products should be optimized for the current event according to URC policies and procedures.

#### **NOTE**

***If the “Save Adaptation Data” procedure was not followed, record values currently being used before making changes. These will be needed after the storm passes.***

### i. 16-Level Products

Velocity data (display) levels for the 16-data level products can be set to display hurricane force winds. Note the default settings for the 16-data level Velocity products

display a maximum of 64 kt, the minimum speed for a Category 1 hurricane. Begin with the suggested values, then adjust accordingly during the event to best display the maximum winds near the eye or center of the tropical cyclone.

Note that the threshold for a Category 2 hurricane is 83 knots, Category 3 is 96 knots, Category 4 is 114 knots, and (only seen with a 1.94 knot velocity increment) Category 5 is 135 knots. The Saffir-Simpson scale (summarized above) refers to winds measured 10 meters above the ground, not at the elevation of radar returns. Nevertheless, these speeds can draw your attention to locations with significant velocities. Other suggested 16-level Velocity values are 35, 65, 85, 100, 115, and 135 knots for Codes 10-15, respectively.

- Select **Products** in the HCI's RPG icon.
- From the RPG Products menu, choose **Selectable Parameters**, then select Category: **Velocity Data Levels**.
- Unlock the Edit Selectable Product Parameters screen using the **URC** password.
- Select Velocity Table **Precip 16 / 0.97** (for the lower velocity increment).
- Change Code 15 to **100** or other desired number and then set the lower Code numbers to the desired speeds.
- Select Velocity Table **Precip 16 / 1.94** (for the higher velocity increment).
- Change Code 15 to **135** and then set the lower Code numbers to the desired speeds.
- **Save** the settings and confirm changes.
- **Close** the Velocity Data levels and Selectable Parameters windows.

## ii. 256-Level Products

The velocity color scale displayed with all 8-bit (256-data level) Velocity products on AWIPS is the same and *may be the same for both velocity increments*, making it hard to tell which velocity increment is being used. AWIPS D2D cursor sampling of velocity products will indicate speeds in tenths of a knot for velocity increments of 0.97 kt and ***in whole knots for velocity increments of 1.94 kt***. You can also view the scale on a 4-bit (16-level) or 3-bit (8-level) Velocity product to confirm which velocity increment is being used. Edit the 256-level Velocity color scale on AWIPS D2D for radial velocities that exceed 100 knots (inbound or outbound) to improve the visibility of selected velocities (such as 114 kt and, at the 1.94 kt increment, 135 kt).

### NOTE

***The display levels of Storm Relative Mean Radial Velocity products (SRM and SRR) will probably differ from those used for Base Velocity.***

[{Return to Contents ↑}](#)

## 8b. Super Resolution (SR) Products

SR Reflectivity products (with a range resolution of 0.25 km and azimuthal resolution of 0.5 degree) can be displayed out to 460 km (248 nm) in the low elevation split cuts. SR Velocity products with the same resolution as SR Reflectivity can be displayed out to 300 km (162 nm). Both types of products are displayed with 256 data levels. As stated in EHB 6-521, "The finer spatial sampling of this high resolution base data may improve the identification of small or weak mesocyclones and Tornado Vortex Signatures (TVS's)." Only the split cuts (i.e., elevation angles at and below 2.5° for VCP 31 and below 1.65 degrees in all other VCPs) are processed for Super Resolution. Algorithms do not use SR data. Strictly speaking, enabling Super Resolution is not a selectable product parameter but, instead, a change in the data stream from the RDA to the RPG. **SR is enabled by default.** If it is *not* enabled, follow these steps:

- Select the box to the right of **Super Res:** (in the stack below the USERS icon).
- Toggle the setting from **DISABLED** to **ENABLED**.

### NOTE

*There are two indicators on the RPG HCI to show if SR is enabled during the low elevation split cuts: in the text string grouping below the USERS icon) and in the radome, directly under the elevation readout. In addition, the system status log (opened from Status in the RPG icon) will display "SR" at the far right of the status line for each volume scan.*

*SR products are available by One-Time Requests (OTRs) or Radar Multiple Requests (RMRs) from a non-associated AWIPS.*

[\[Return to Contents \]](#)

## 8c. Precipitation Product Display Levels

Adjust precipitation data display levels if the potential for extremely heavy rainfall exists. [Maximum displayable values are 12.7 inches for One Hour Precipitation (OHP) and Three Hour Precipitation (THP), and 25.4 inches for Storm Total Precipitation (STP) and User Selectable Precipitation (USP).]

- Select **Products** in the HCI's RPG icon.
- From the RPG Products menu, choose **Selectable Parameters**, then select **Category: OHP/THP Data Levels**.
- Unlock the Edit Selectable Product Parameters screen using the **URC** password.
- Change Codes 3 through 16 as desired for the current event.
- **Save** and confirm changes.
- Select Category: **STP Data Levels**.

- **Change Codes 3 through 16 as desired for the current event.**
- **Save, confirm changes, and Close.**

### NOTE

*The data levels for 256-data level storm total precipitation (i.e., DSP) are set based on the maximum accumulation observed: the levels are every 0.01 inches up to 2.55 inches, every 0.02 inches from 2.56 to 5.10 inches, every 0.03 inches for 5.11 to 7.65 inches, every 0.04 inches for 7.66 to 10.20 inches, etc. Unlike the (4-bit) STP, OHP, and THP products, these levels are not user-adaptable.*

[{Return to Contents ↑}](#)

#### 9. Archive Level II

Sites sending NWS, DoD, or FAA radar data to the NWS Level II Data Collection and Distribution Network need to ensure that the Local Data Manager (LDM) connection to the RPG is working properly. The status can be checked by going to <http://weather.noaa.gov/monitor/radar2/> to see how current (or latent) the Level II data are. NWS sites are responsible for sending data from DoD or FAA sites they control.

The system status log (opened from **Status** in the RPG icon) will display "L2: 3 SR" at the far right of the status line for each volume scan when SR is being transmitted through Archive Level II.

[{Return to Contents ↑}](#)

#### B. AWIPS Preparation (At an AWIPS D-2D Workstation):

##### 10. AWIPS "Health" Check-up

The "health" of AWIPS systems at the WFOs is integral to radar data availability and re-distribution to the rest of the NWS. All offices in the forecast path of an approaching landfalling tropical system are asked to additionally review the AWIPS Severe Weather Checklist maintained by OS&T SEC at:

<https://www.ops1.nws.noaa.gov/Secure/awipsnew/install/SvrWxHealthOB9.pdf>

[{Return to Contents ↑}](#)

## 11. Data Archiving

Ensure that the Product Archiver is running for the tropical event. Left click on the graphics monitor background, select "Data Archiver," and then select "Data to Archive" or "Data to Store" and ensure appropriate products are listed.

[{Return to Contents ↑}](#)

## 12. Data Requests from Adjacent Radars

Initiate "radar multiple requests" (RMRs) to adjacent radar sites for products not centrally collected nor available via SBN (procedure 14). (Refer to AWIPS OB9 System Managers Manual Tables 7.6.2 and 7.6.3 for these products.) Continuously monitor adjacent sites, since significant tropical cyclone phenomena are based in the lower levels, and the radar closest to the center will sample the environment best.

[{Return to Contents ↑}](#)

## 13. Communications Backup

In advance of major land-falling tropical systems, the Radar Operations Center, Regional Focal Points, and the CIO's office will partner to evaluate and initiate pre-emptive telecommunication (telecom) solutions and backup scenarios as appropriate. At a minimum, our major telecom Providers will be asked to place a heightened watch on the telecoms they provide to NWS and WSR-88D systems in the forecast path of any major land-falling system. We learned from the 2005 hurricane season that our primary Providers routinely mobilize and stage telecom systems recovery equipment just outside of a storm's forecast track, but dialogs with the telephone companies will be systematically initiated in any event.

The WSR-88D Hotline will work with the respective Regions and WFOs to ensure adjacent WFOs have X.25 dial backup access to WSR-88Ds in the direct path of an approaching tropical system and that those backup connections are operational prior to landfall. In parallel, the WSR-88D Hotline will work with the respective Regions and WFOs to ensure a "spare" POTS (Plain Old Telephone Service) dial line (e.g., a spare office facsimile dial line) is extended to the RPG, made operational, and released to respective backup WFOs if and when service provided by one of the main NWS Providers is knocked out of operation.

Ensure you have a copy of your latest AWIPS radar file help sheet. The radar file help sheets provide site-specific radar access info that could become critical information in the event default telecommunication systems become inoperative during a tropical event. AWIPS radar file help sheet are now maintained on a secure server at the ROC and ESA's at each office have been provided with the necessary access info to the server. Contact the WSR-88D Hotline for assistance with this.

The AWIPS Severe Weather Checklist referenced in Step 10 (above) includes the recommendation to test and verify x.25 dial and "WAN Dedicated" backup capabilities during benign weather. We cannot recommend strongly enough that both x.25 dial back and WAN Dedicated operations be tested in advance of any landfalling tropical system. Experience is showing problems with the x.25 dial backup because it is exercised so infrequently. And similarly, WAN Dedicated functionality requires pre-constructed and saved RPS Lists for each VCP. Your system should be checked to ensure it has RPS Lists saved for those VCPs referenced in Step 4 for those radars to which your system has WAN Dedicated access.

[{Return to Contents ↑}](#)

#### 14. Minimum RPS Lists

A set of suggested "minimum RPS Lists" was originally developed when RPS Lists were confined to only 20 products. However, the fundamental philosophy remains the same as operators interrogate tropical cyclones based on range from the radar and intensity.

#### **NOTE**

***Ensure that your current WSR-88D RPS List on AWIPS includes the products on the lists shown below.***

Storm Relative Mean Radial Velocity products (SRR, SRM) should be generated often via One-Time Requests (OTRs) or Radar Multiple Requests (RMRs) with individual or field motions **input frequently by the radar operator**. The algorithm that estimates storm motion may not be able to produce a useful motion on its own due to the rotational aspects of tropical cyclones.

If 8-bit (256-data level) velocity is on your RPS List, your AWIPS will generate an 8-bit SRM; change the motion parameters by selecting **Tools** and, when the window appears, select **Custom Storm Motion** and use the slider bars to adjust the values as necessary. If the SRM was being displayed prior to these changes, clear the display and reselect the product; the new motion will now be applied.

**The following recommendations do not include products already on AWIPS National Datasets (prodList.txt).**

**Minimum recommended RPS List: Center more than 124 nmi from radar**

<i>Product</i>	<i>AWIPS Mnem.</i>	<i>RPG Code#</i>	<i>Elevation Angle (degrees)</i>	<i>Data Levels</i>	<i>Range Resolution in km (nm)</i>
Base Reflectivity	Z	20	1.5	16	<b>2 (1.1)</b>
Super-Res. Reflectivity*	HZ	153	0.5	256	<b>0.25 (0.13)</b>
	HZ	153	1.5	256	<b>0.25 (0.13)</b>
Base Velocity	V	99	0.5	256	<b>0.25 (0.13)</b>
	V	99	1.5	256	<b>0.25 (0.13)</b>
Super-Res. Velocity*	HV	154	0.5	256	<b>0.25 (0.13)</b>
	HV	154	1.5	256	<b>0.25 (0.13)</b>

- **Super Resolution (SR) needs to be activated. (See Section 8b.) High resolution products (codes 94 and 99) can be replaced by SR products (codes 153 and 154).**

**Minimum recommended RPS List: Center 62-124 nmi from radar**

<i>Product</i>	<i>AWIPS Mnem.</i>	<i>RPG Code#</i>	<i>Elevation Angle (degrees)</i>	<i>Data Levels</i>	<i>Range Resolution in km (nm)</i>
Base Reflectivity	Z	19	6.0	16	<b>1 (0.54)</b>
	Z	94	0.5	256	<b>1 (0.54)</b>
	Z	94	1.5	256	<b>1 (0.54)</b>
Super-Res. Reflectivity	HZ	153	0.5	256	<b>0.25 (0.13)</b>
	HZ	153	1.5	256	<b>0.25 (0.13)</b>
Base Velocity	V	99	0.5	256	<b>0.25 (0.13)</b>
	V	99	1.5	256	<b>0.25 (0.13)</b>
Super-Res. Velocity	HV	154	0.5	256	<b>0.25 (0.13)</b>
	HV	154	1.5	256	<b>0.25 (0.13)</b>

**Minimum recommended RPS List: Center 32-62 nmi from radar**

<i><b>Product</b></i>	<i><b>AWIPS Mnem.</b></i>	<i><b>RPG Code#</b></i>	<i><b>Elevation Angle (degrees)</b></i>	<i><b>Data Levels</b></i>	<i><b>Range Resolution in km (nm)</b></i>
Base Reflectivity	Z	19	6.0	16	<b>1 (0.54)</b>
	Z	94	0.5	256	<b>1 (0.54)</b>
	Z	94	1.5	256	<b>1 (0.54)</b>
Super-Res. Reflectivity	HZ	153	0.5	256	<b>0.25 (0.13)</b>
	HZ	153	1.5	256	<b>0.25 (0.13)</b>
Base Velocity	V	26	0.5	16	<b>0.5 (0.27)</b>
	V	26	1.5	16	<b>0.5 (0.27)</b>
	V	99	0.5	256	<b>0.25 (0.13)</b>
	V	99	1.5	256	<b>0.25 (0.13)</b>
Super-Res. Velocity	HV	154	0.5	256	<b>0.25 (0.13)</b>
	HV	154	1.5	256	<b>0.25 (0.13)</b>

**Minimum recommended RPS List: Center 0-32 nmi from radar**

<i><b>Product</b></i>	<i><b>AWIPS Mnem.</b></i>	<i><b>RPG Code#</b></i>	<i><b>Elevation Angle (degrees)</b></i>	<i><b>Data Levels</b></i>	<i><b>Range Resolution in km (nm)</b></i>
Base Reflectivity	Z	19	6.0	16	<b>1 (0.54)</b>
	Z	19	9.9	16	<b>1 (0.54)</b>
Super-Res. Reflectivity	HZ	153	0.5	256	<b>0.25 (0.13)</b>
	HZ	153	1.5	256	<b>0.25 (0.13)</b>
Base Velocity	V	25	0.5	16	<b>0.25 (0.13)</b>
	V	26	0.5	16	<b>0.5 (0.27)</b>
	V	26	1.5	16	<b>0.5 (0.27)</b>
	V	99	0.5	256	<b>0.25 (0.13)</b>
	V	99	1.5	256	<b>0.25 (0.13)</b>

<b>Product</b>	<b>AWIPS Mnem.</b>	<b>RPG Code#</b>	<b>Elevation Angle (degrees)</b>	<b>Data Levels</b>	<b>Range Resolution in km (nm)</b>
	V	99	2.4	256	<b>0.25 (0.13)</b>
Base Velocity	V	99	3.4	256	<b>0.25 (0.13)</b>
Super-Res. Velocity	HV	154	0.5	256	<b>0.25 (0.13)</b>
	HV	154	1.5	256	<b>0.25 (0.13)</b>

**NOTE:**

***This document is a living document and will be updated as necessary (e.g., due to new research or software changes).***

For the most recent version, see <http://www.ofcm.noaa.gov/nhop/wsr-88d/> and select the appropriate .pdf file (e.g., [http://www.ofcm.noaa.gov/nhop/wsr-88d/nat\\_trop\\_cyc\\_wsr-88d\\_ops\\_plan\\_09\\_B11.pdf](http://www.ofcm.noaa.gov/nhop/wsr-88d/nat_trop_cyc_wsr-88d_ops_plan_09_B11.pdf) for the 2009 Build 11 version).

For a “**QUICK CHECK**” listing of items covered by the WSR-88D Tropical Cyclone Operations Plan (or for any other questions regarding the operation and performance of a WSR-88D radar system), contact the [WSR-88D Field Support Hotline](#) (800-643-3363 or 405-573-8900). The Hotline is normally staffed 24 hours a day 7 days per week by a maintenance specialist and from 7:00 a.m. to 7:00 p.m. CDT on regular workdays by a meteorologist. It *may* have a meteorologist on duty at additional times during major weather events, such as hurricanes. Someone from the Hotline may proactively contact field sites to ensure readiness for these events, especially with respect to communications. In addition, if necessary, the Hotline will contact Applications Branch specialists for problems with velocity, VCP selection, and precipitation estimation.

**Acknowledgments:** This document was originated by Scott Spratt and Dave Sharp (both at WFO Melbourne, FL) and Colin McAdie (National Hurricane Center, NHC). Reviews and updates have been made by Dan Berkowitz (ROC Applications Branch), Scott Spratt, and Colin McAdie. Suggested Minimum RPS Lists and use of the 8-data level velocity product were originally provided by Stacy Stewart (NHC). Use of the 256-data level velocity was suggested by Liz Quetone (Warning Decision Training Branch, WDTB). TPV adaptable parameter threshold and MDA settings were suggested by Robert R. Lee (ROC Applications Branch).

Additional helpful suggestions were offered by Mike Istok (NWS Office of Science and Technology, Software Engineering Center), Tim Crum (NWS Radar Focal Point, ROC), Jeff Waldstreicher (Scientific Services Division, NWS Eastern Region Headquarters), Joe Chrisman (ROC Engineering Branch), Jami Boettcher, Paul Schlatter, and Andy Wood (Warning Decision Training Branch), the ROC Radar Support Team (especially Dan Frashier, Tony Ray, Mark Albertelly, Stan Grell, and Nickie Flambures), Cindy Chrisman (ROC System Documentation Section), and ROC Applications Branch members Mark Fresch (now in the NWS Office of Hydrologic Development), Dave Zittel, Rich Murnan, and Randy Steadham.

[{Return to Contents ↑}](#)